

## TEMPORARY TRAFFIC CONTROL TYPICAL APPLICATION

**IMPORTANT:**  
THIS DRAWING SHALL BE USED IN COMBINATION WITH THE GENERAL NOTES MD 104.00-01 - MD 104.00-18 AND STANDARD DETAILS MD 104.01-01 - MD 104.01-62

**NOTES:**

THE 'BEGIN AND END SHOULDER USE' SIGNS SHOULD BE OMITTED WHEN THE SHOULDER CANNOT BE DIFFERENTIATED FROM THE NORMAL TRAVEL PATH.

REFER TO MD 104.01-27 FOR GUIDANCE ON PAVEMENT MARKINGS THROUGH LANE SHIFTS.

- THIS TYPICAL SHALL BE USED FOR ANY LANE SHIFT WHICH SATISFIES EITHER CONDITION 'A' OR 'B':

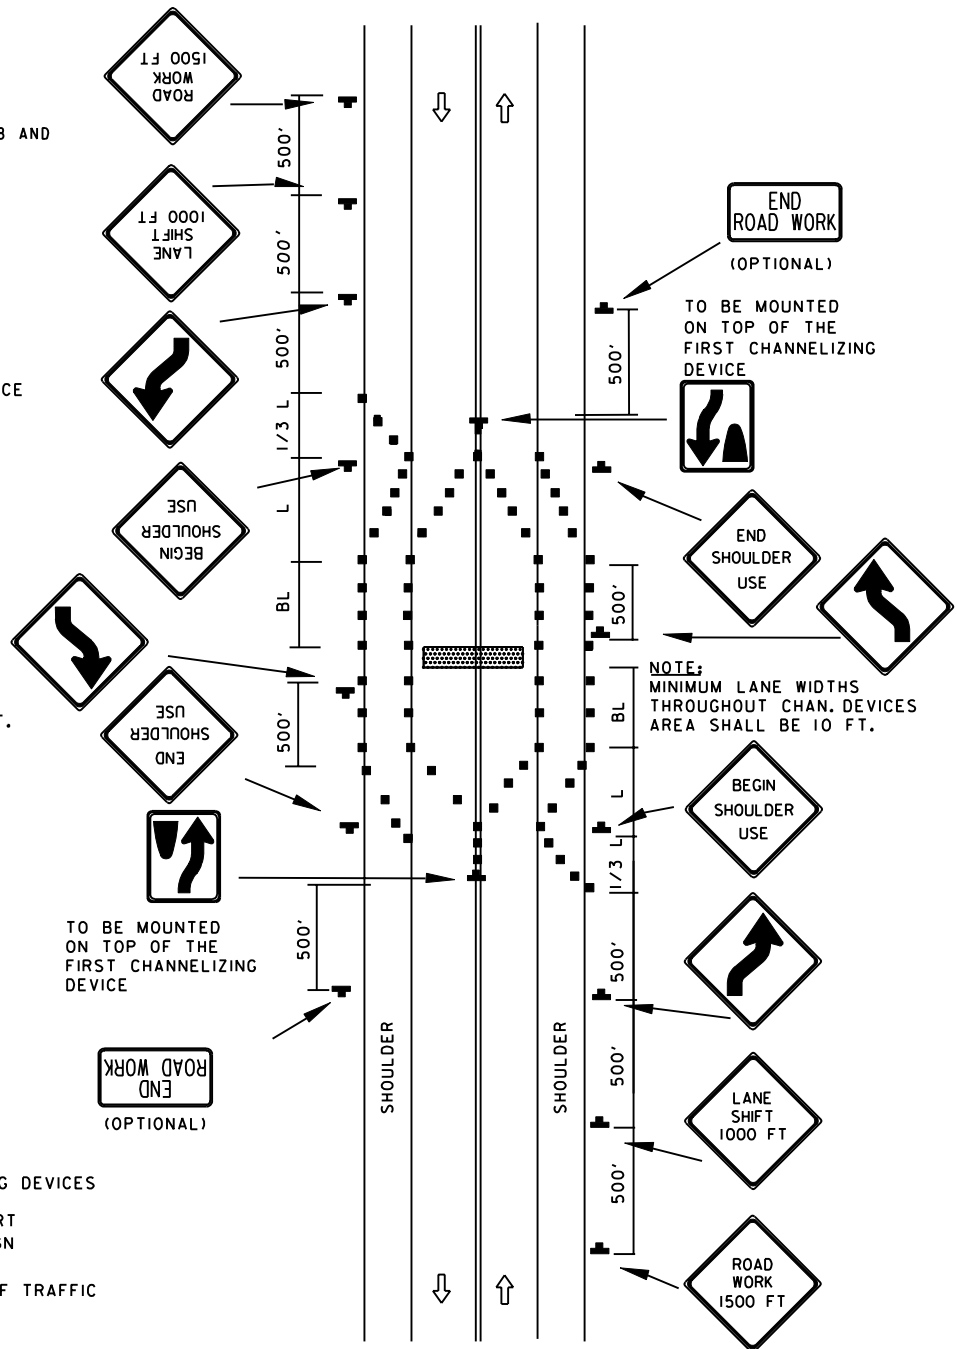
- ▶ **CONDITION 'A':**  
LANE SHIFT IS 'ABRUPT' - SHIFT HAS A TAPER LENGTH LESS THAN THE VALUE SPECIFIED IN THE TAPER LENGTH CRITERIA TABLE REFER TO MD 104.01-62
- ▶ **CONDITION 'B':**  
PREVAILING SPEEDS CANNOT BE MAINTAINED THROUGH THE SHIFT.



- FOR LANE SHIFTS WHICH DO NOT SATISFY ABOVE CONDITIONS:

- ▶ DELETE 'REVERSE CURVE' WARNING SIGNS, AND
- ▶ REPLACE 'LANE SHIFT' SIGNS WITH 'ROAD WORK XXX' SIGNS OR OTHER APPROPRIATE SIGNS AS SHOWN IN TEMPORARY TRAFFIC CONTROL TYPICAL APPLICATIONS.

**KEY:**

- ■ CHANNELIZING DEVICES
- SIGN SUPPORT
- FACE OF SIGN
- ↑ DIRECTION OF TRAFFIC
- ▨ WORK SITE



SPECIFICATION <b>104</b>	CATEGORY CODE ITEMS										
APPROVED	 DIRECTOR - OFFICE OF TRAFFIC AND SAFETY										
 State Highway Administration	<table border="1" style="width: 100%;"> <tr> <td style="width: 50%;">APPROVAL • SHA REVISIONS</td><td style="width: 50%;">APPROVAL • FEDERAL HIGHWAY ADMINISTRATION</td></tr> <tr> <td>APPROVAL 8-20-03</td><td>APPROVAL 9-23-03</td></tr> <tr> <td>REVISED</td><td>REVISED</td></tr> <tr> <td>REVISED</td><td>REVISED</td></tr> <tr> <td>REVISED</td><td>REVISED</td></tr> </table>	APPROVAL • SHA REVISIONS	APPROVAL • FEDERAL HIGHWAY ADMINISTRATION	APPROVAL 8-20-03	APPROVAL 9-23-03	REVISED	REVISED	REVISED	REVISED	REVISED	REVISED
APPROVAL • SHA REVISIONS	APPROVAL • FEDERAL HIGHWAY ADMINISTRATION										
APPROVAL 8-20-03	APPROVAL 9-23-03										
REVISED	REVISED										
REVISED	REVISED										
REVISED	REVISED										

### Maryland Department of Transportation STATE HIGHWAY ADMINISTRATION

STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES  
**LANE SHIFT FOR COMPLETE TRAVEL WAY  
BLOCKAGE/2-LANE, 2-WAY EQL/LESS THAN  
40 MPH/15 MIN - 12 HRS. OR DAYTIME ONLY**

**STANDARD NO.**

**MD 104.02-08**